



Careo 7014



3 1/2 in x 3 1/2 in or 88 mm x 88 mm

Technical datasheet




Careo 7014

WHS: Wood hybrid system

Geolam®

Architectural Eco-Technology



Section tolerances in mm: +/- 2.0 mm or +/- 3/32 in

The outer wpc layer is sanded. The provided dimensions are average thickness (as well for all drawing in that document)

Fire rating:

On request:

ASTM E-84 class A

Euroclass NF EN 135011 : B, s3-d0

Euroclass NF EN 135011 : A2, s3-d0

NFP 92 -507 : M2 or M1

Surfaces finish: Sanded

Other surface textures available on request. Sanding finish and/or shading may vary between runs. WPC thickness may vary in compliance with flame test requirements.

Profiles fastening and installation: Check our website www.geolam.com

Technical information may change without warning.

Standard length: 9 ft 10 in | 3.0 m

On order any length from: 7 ft to 19 ft 8 in | 2.15 m to 6 m

Weight: 1.79 lb/ft | 2.66 kg/m

Secondary moment Ix (cm⁴): 81.74

Secondary moment Iy (cm⁴): 81.74

Section modulus Z+x (cm³): 19.55

Section modulus Z-x (cm³): 19.55

Section modulus Z+y (cm³): 19.55

Section modulus Z-y (cm³): 19.55

Core in anodized aluminum alloy: A6063S-T5 Serie 6000

Coefficient of Thermal Expansion (20-100°C):

23.4 µm/m/°C

Modulus of Elasticity: 68.9 GPa

Max Tensile Strength: 186 Mpa

Carbon Footprint:

WPC : 1.54 kg CO₂/Kg WPC

Alu : 0.87 kg CO₂/Kg Alu



Teak



Rosewood



Bilinga



Ivory



Limba




Wenge



Carbon



Any color on request

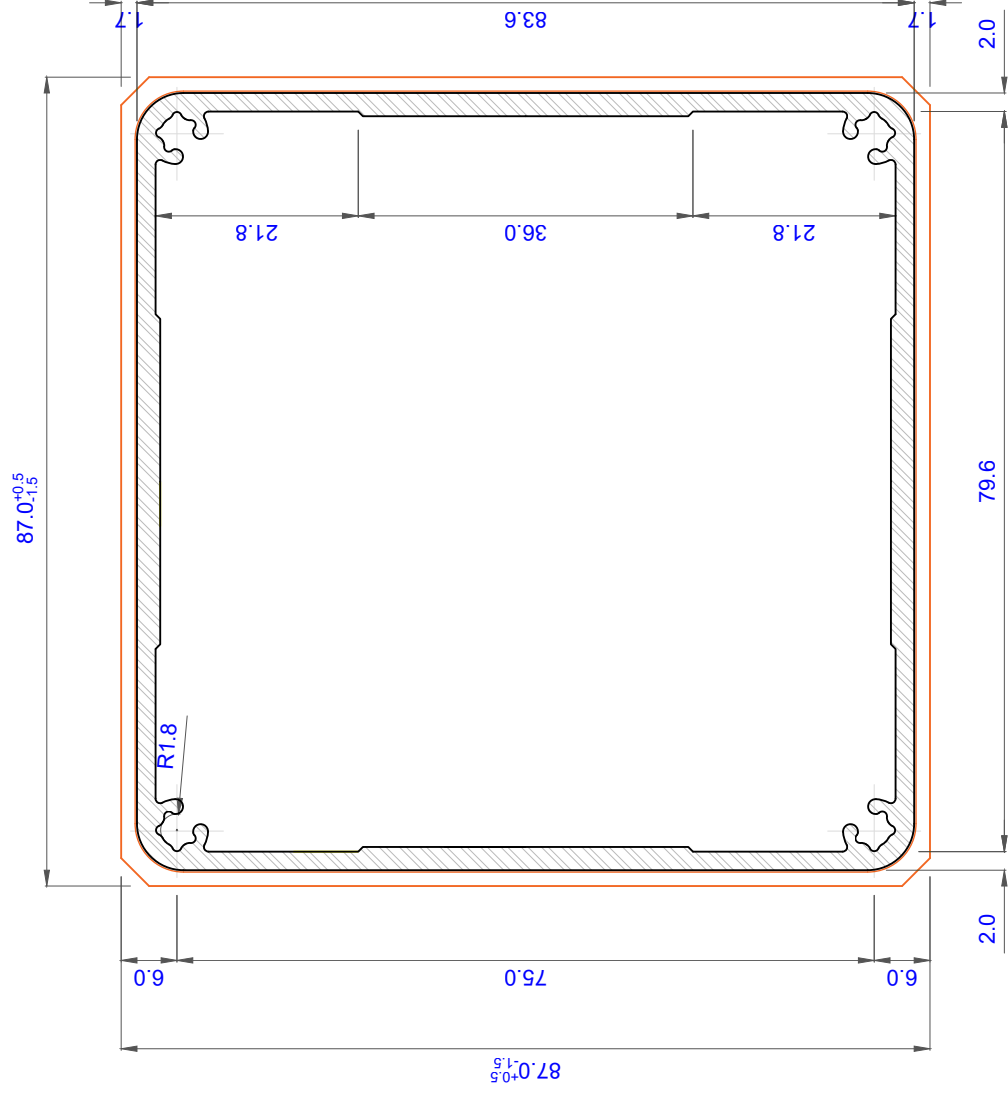

Technical specifications, dimensions in mm		Wood hybrid system WHS		Type 1.0
Weight (kg/ml)	2.66	Careo 7014		
Cross section, secondary moment Ix (cm ⁴)	81.74			
Cross section, secondary moment Iy (cm ⁴)	81.74			
		19.55	19.55	19.55
		Cross section coefficient Z+x (cm ³)	Cross section coefficient Z-x (cm ³)	Cross section coefficient Z+y (cm ³)
		19.55	19.55	19.55
		Cross section coefficient Z-y (cm ³)		
		19.55		

Cici and Hyatt Brown Museum of Art
Trim louver

Daytona Beach
USA

2015

Careo 7014

Limba